

Configuration

CBA - 4A - 1 - F12 F12 F04 - B00 B00 - S0 0

| | | | | | | | | | |
|-------|----------|--------|--------------|---------------|------|------------|------------|---------|----------|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Model | Diameter | Volume | Liquid Inlet | Liquid Outlet | Vent | Tube Drain | Main Drain | Sensors | Brackets |

Instructions

A selection is required for each option.
 Contact support for revision or copy exact information.







Standard options are highlighted

| 0. Model | |
|--------------------|-----|
| Standard debubbler | CBA |




| 1. Diameter | |
|-------------|----|
| 4 inch | 4A |

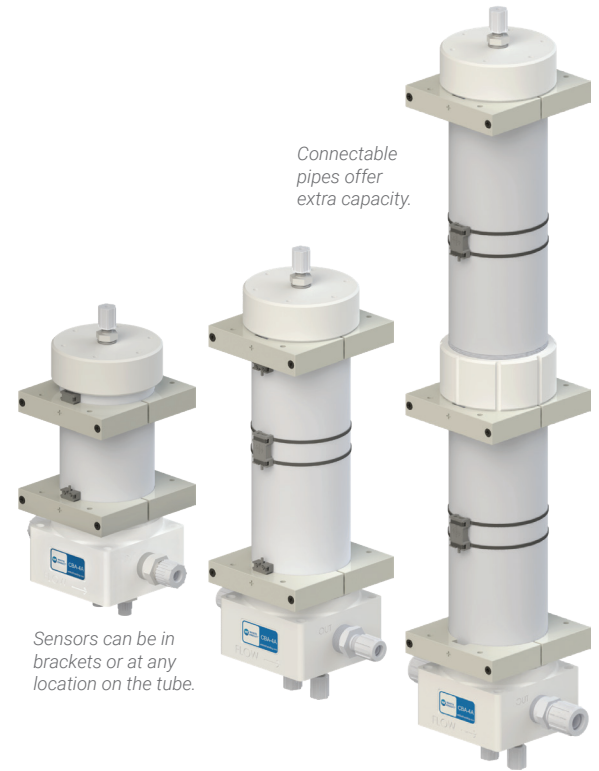
| 2. Volume | |
|-----------|---|
| 1 liter | 1 |
| 2 liter | 2 |
| 3 liter | 3 |
| 4 liter * | 4 |
| 5 liter * | 5 |
| 6 liter * | 6 |

* Two coupled tubes.

| Liquid Fittings | | 3. Inlet | 4. Outlet |
|---|-----------|----------|-----------|
| Plugged | | B00 | B00 |
|  Flaretek Compatible | 1/2 in. | F08 | F08 |
| | 3/4 in. | F12 | F12 |
| | 1 in. | F16 | F16 |
| | 1-1/4 in. | F20 | F20 |
|  Pillar S-300 | 1/2 in. | P08 | P08 |
| | 3/4 in. | P12 | P12 |
| | 1 in. | P16 | P16 |
| | 1-1/4 in. | P20 | P20 |
|  PrimeLock | 1/2 in. | L08 | L08 |
| | 3/4 in. | L12 | L12 |
| | 1 in. | L16 | L16 |
| | 1-1/4 in. | L20 | L20 |
|  FNPT | 1/2 in. | N08 | N08 |
| | 3/4 in. | N12 | N12 |
| | 1 in. | N16 | N16 |
|  Tube Out | 1/2 in. | T08 | T08 |
| | 3/4 in. | T12 | T12 |
| | 1 in. | T16 | T16 |
| | 1-1/4 in. | T20 | T20 |
|  Weldable | 3/4 in. | W12 | W12 |
| | 1 in. | W16 | W16 |

CBA Series debubblers with F20, P20, L20, or T20 liquid fittings must be wall-mounted with brackets.

| Vent & Drain Fittings | | 5. Vent | 6. Tube Drain | 7. Main Drain |
|---|---------|---------|---------------|---------------|
| Plugged | | B00 | B00 | B00 |
|  Flaretek Compatible | 1/4 in. | F04 | F04 | F04 |
| | 3/8 in. | F06 | F06 | F06 |
|  Pillar S-300 | 1/8 in. | P02 | P02 | P02 |
| | 1/4 in. | P04 | P04 | P04 |
| | 3/8 in. | P06 | P06 | P06 |
|  FNPT | 1/4 in. | N04 | N04 | N04 |
| | 3/8 in. | N06 | N06 | N06 |



Connectable pipes offer extra capacity.

Sensors can be in brackets or at any location on the tube.

| 8. Liquid Level Sensors | |
|-------------------------|----|
| No Sensors | S0 |
| One Sensor | S1 |
| Two Sensors | S2 |
| Three Sensors | S3 |
| Four Sensors | S4 |

| 9. Mounting Brackets | |
|----------------------|---|
| No Brackets | 0 |
| One Bracket | 1 |
| Two Brackets | 2 |
| Three Brackets | 3 |
| Four Brackets | 4 |